


1. Information and hints

Electrical data:

Basic unit without accessories eg: valve actuators or other actuators !

Venkon EC Series 6, electromechanical design				
unit size	BG61	BG63	BG66	BG67
No. of fans	1S	1T	1S + 1T	2T
mains voltage	115V AC	115V AC	115V AC	115V AC
power frequency	60 Hz	60 Hz	60 Hz	60 Hz
rated power	100 W	65 W	170 W	136 W
operating current	1.5 A	1.0 A	2.4 A	2.1 A
Leakage current	< 3.5 mA	< 3.5 mA	< 3.5 mA	< 3.5 mA
Ri analog input	100 KΩ	100 KΩ	50 KΩ	50 KΩ
MCA	1.88 A	1.25 A	3 A	2.63 A
MOP	15 A			
degree of protection	IP21			
protection class	I			

- cable types:
- without *: NYM-J or equivalent.
 - with *: e.g. J-Y(ST)Y 0.8 mm or equivalent.
 - with **: UNITRONIC® BUS LD or equivalent.
 - with * or **: Lay separately from power cables.
 - Terminals suitable for a maximum of 2.5 mm².

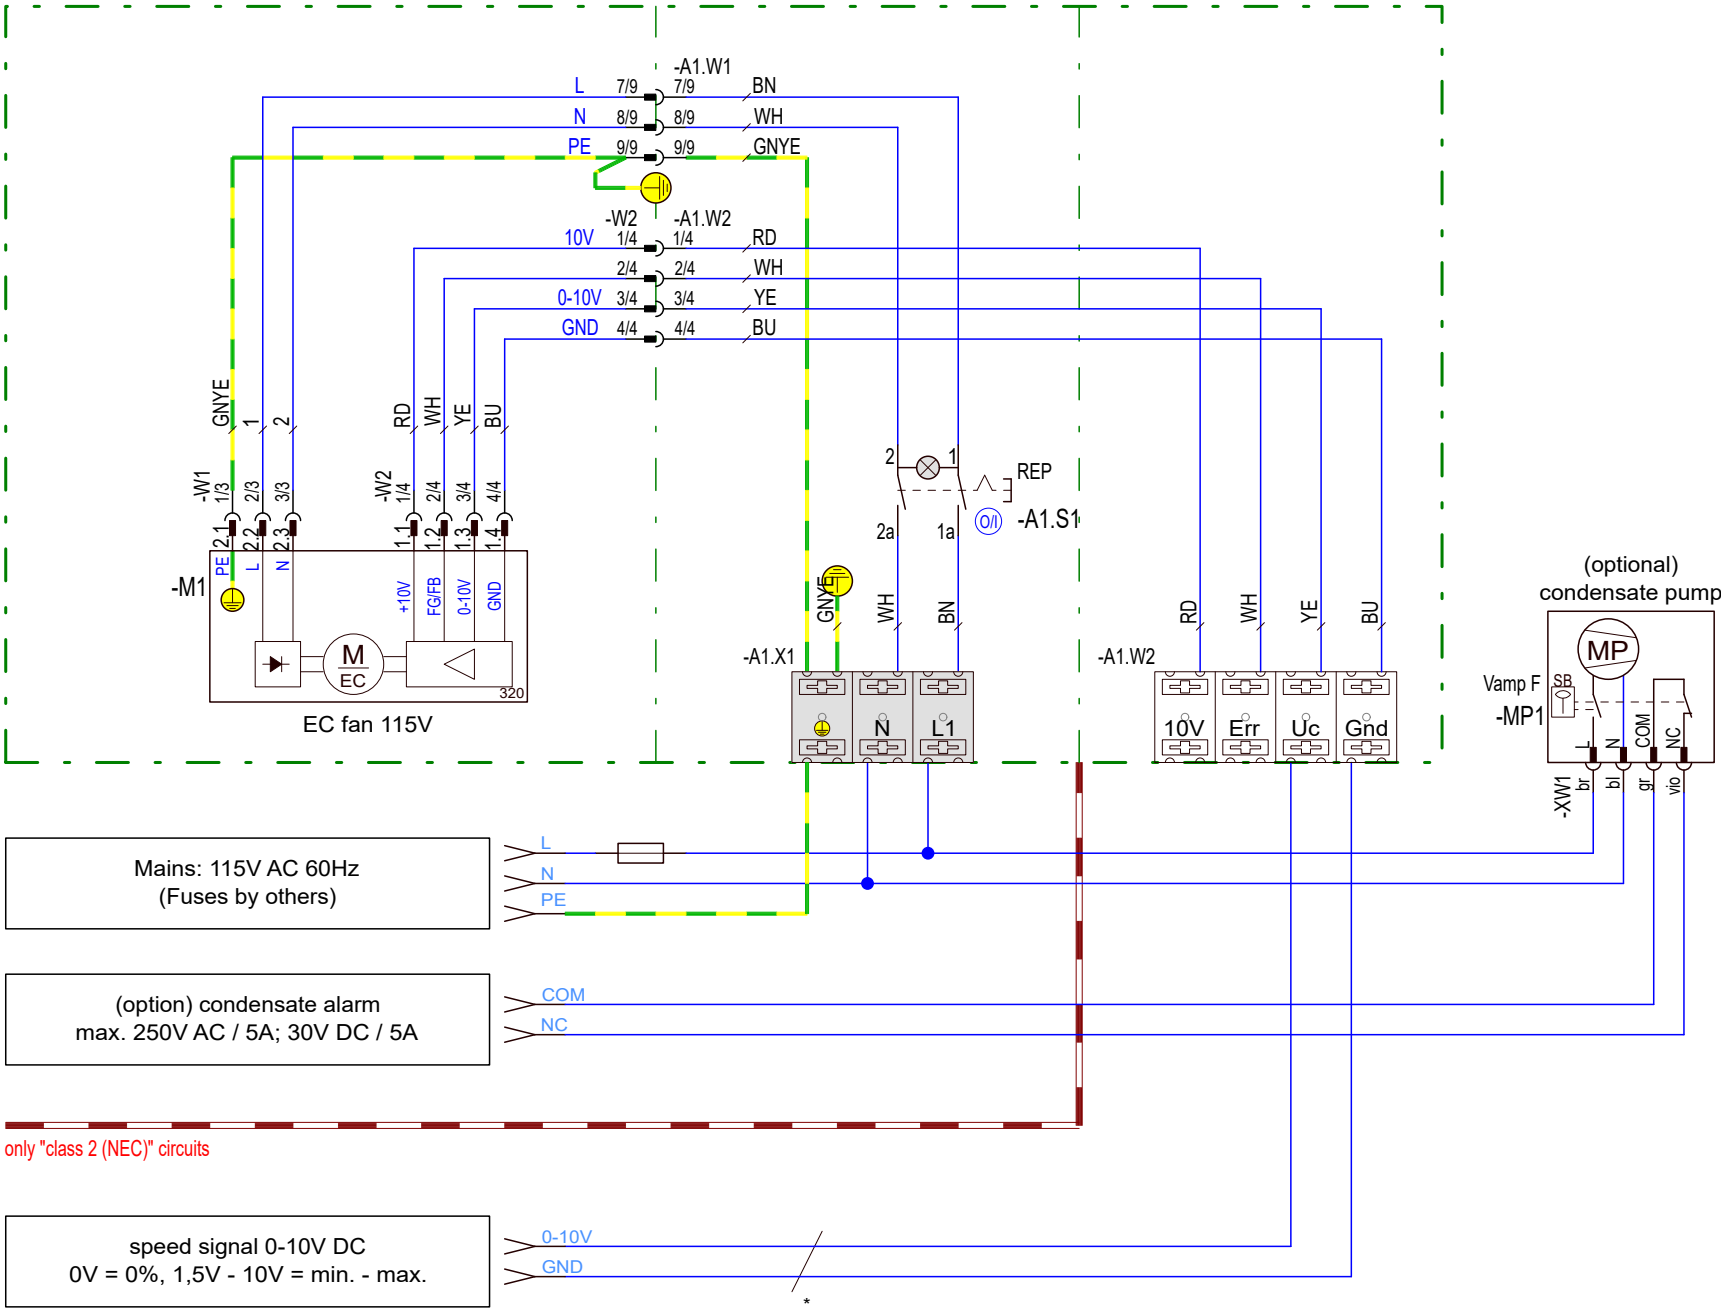

				(EN)	Date	Name	KAMPMANN Genau mein Klima. Tel: +49 (0) 591 - 7108-0 Fax: 7108-300 E-Mail: info@kampmann.de Internet: www.kampmann.de	Product group		1.486		Designation	
				Proc.	01.07.2026	P.Frericks		Article number		14861xxxxxxU02M		Venkon S6 EC recirculating air, 2/4 pipe UL-version, with rep. switch, without Valve(s), condensate pump optional connection box fitted, control by others	
				Checked				type		U02M			
				Standard				SAP number		2474371			
				Origin				Project Number / Project					
				mCAD				Order Number					
Index	Revision			Date	Name			CAD	19596_00		Page	1 of 1	plant
COPYRIGHT RESERVED - Drawing contains information which has been developed by us and is protected. It must not be made accessible to 3rd persons, competitors in particular, without our prior authorisation. Infringements will lead to a claim for damages !												Location	